



倍仕得电气科技(杭州)股份有限公司
BEISIT ELECTRIC TECH (HANGZHOU) CO.,LTD.



Fluid Connector
BSL 流体连接器

倍仕得园区鸟瞰图
Beisit factory Aeroview



做人，把人品做好，
做企业，把产品做好。

董事长： 郑永

产品合集
Product Collection



品牌解析

Brand Definition



"I" stands for "Integrity 诚信"

"I" stands for "International 国际"

"BEST": Best 最好

做诚信的国际企业，以更好的品质服务客户

Functions as an international company of high integrity whose mission is to provide customer with finest products and services

倍仕得

倍：即多，广聚英才；加倍，业精于勤；倍增，高效发展

pronounced as "bei", means "more", gathering more talents; mastery of work comes from more diligence; developing with high efficiency.

仕：人才，德才兼备；仕途，个人和企业前景光明

pronounced as "shi", means "talents", a person with ability and integrity; Both enterprise and individual should have a bright future, indicating the idea of people-oriented.

得：拥有，拥有更高价值

pronounced as "de", means "possess", to create and possess higher value.

广聚英才，共创美好未来

Gather a large number of talents, and create a glorious future


流体连接器净化车间

Quick Fluid Connector Purification Workshop

BEISIT®

精密刀具设计制造能力

Design and Manufacture of Precision Cutting Tools.



精密刀具设计制造

Design and Manufacture of Precise Cutting Tools



精密刀具设计制造能力

Design and Manufacture of Precision Cutting Tools

加工精度最高能精确到0.01mm


The machining accuracy can be accurate to 0.01mm

3天提供金属样件

3days to provide metal samples

7天样件交付

7days to deliver samples



企业认证 Company Certifications



信息化系统 Informatization System



高效快捷的信息化系统
Efficient and fast Informatization system.



检测中心 Testing Center



原材料：金属材质检测

The raw materials:metal material testing

密封件：抗老化测试、硬度检测

The sealing:anti-aging test,hardness testing

弹簧：疲劳测试，弹力值检测

The spring:fatigue test,spring force detection



高低温交变湿热试验箱
High and Low Temperature Alternating Humid Heat Test Chamber



流量流阻测试仪
Flow resistance tester



全自动数显弹簧疲劳试验机
Automatic digital display spring fatigue testing machine



机加工零件：粗糙度检测、尺寸测量

Machined parts: roughness detection, dimensional measurement

表面处理：膜厚检测、盐雾测试

Surface treatment: film thickness detection, salt spray test

产品：耐压测试、密封性测试、流量系数测试、连接力和分开力测试、耐久性测试、最小爆破压力测试、高温测试、低温测试、互换性测试

Product: withstand voltage test, sealing test, flow coefficient test, connection and separation force test, durability test, sinimum burst pressure test, high temperature test, low temperature test, interchangeability test



全自动数显弹簧拉压力试验机
Automatic digital display spring tension pressure testing machine




中性盐雾试验箱
Neutral Salt Spray Tester



图像尺寸测量仪
Image dimension measuring instrument



气密性检测仪
Air tightness tester

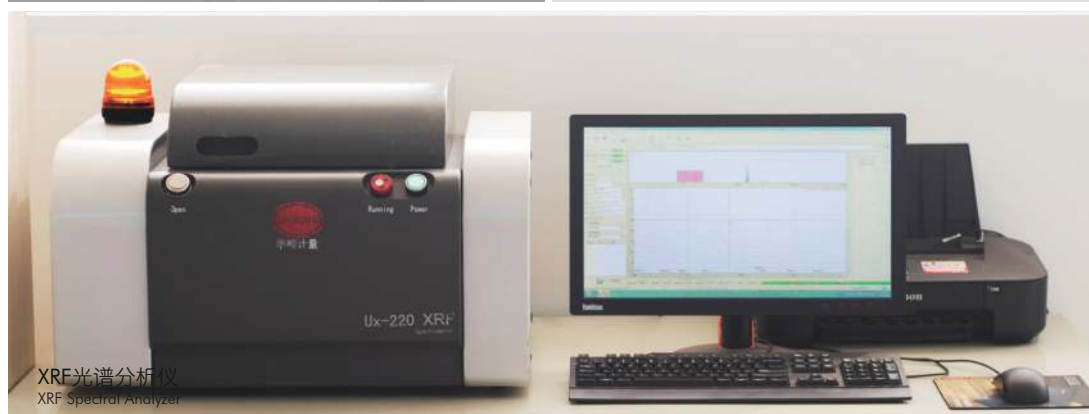

XRF光谱分析仪
XRF Spectral Analyzer

企业文化

Corporate Culture



倍仕得使命：为全球工业提供最可靠的连接器产品
Mission: To supply most reliable connectors for global industry.

客户价值观：敬畏客户；为客户创造独特价值的决心不动摇
Customer Value: Revere clients; Never waver in determination to create unique value for our clients.

品质价值观：品质如命，只有一次；做出100%合格产品的决心不动摇
Quality Value: Quality as life, only once. Never waver in determination to produce 100% qualified products.

A large, stylized image of the Earth from space, showing the Americas. Overlaid on the globe is a complex network of glowing blue lines and dots, representing global connectivity and technology.

连接世界 · 连接未来

BSL

流体连接器

Fluid Connector



安全环保 Safe & Environmental

- 双向平面密封，连接/断开无滴漏。
- 平面密封设计，既方便清洁，又避免介质受污染。
- 插头、插座均配有保护套，防止在运输中密封面受污染。
- 有断开卸压选型需求，请联系我司。
- Bi-directional flat sealed design that ensures no leakage during connection and disconnection.
- Flat seal design, which is easy to clean and avoids contamination of the medium.
- Plug and Socket are equipped with protective caps to prevent the sealing surface from being polluted during transportation.
- Please contact us if you have requirement for pressure relief after disconnection.

稳定可靠 Stable & Reliable

- 钢珠锁紧&内部长导向结构，适用更大的机械应力环境。
- 有多种密封材质O型圈可选，适应不同介质温度需求，保证密封效果长期稳定可靠。
- 插头插座连接处O型圈的径向设计，保证在连接时，阀门打开前已完成密封。
- Steel ball locking and internal long guiding structure is suitable for greater mechanical stress environment.
- Various sealing material O-rings are available to meet the temperature requirements of different media and guarantee long-term stable & and reliable sealing performance.
- The radial design of the O-ring at the connection of the Plug and Socket ensures that the sealing function has been completed before the valve is opened during connection.

方便快捷 Convenient

- 钢珠锁紧自动连接，推入即可锁紧连接并密封，视线外亦可单手操作，简单轻松，方便快捷。
- 多种颜色选择，快速辨别不同回路。
- G外螺纹默认带密封圈，使安装更方便，密封更轻松。
- 凸肩和滚花的长锁紧环更容易抓握和断开。
- Steel ball locking automatic connection, push-in to lock the connection and seal, also can be operated with one hand out of sight, simple and easy, convenient and quick.
- Multiple color options for quick identification of different circuits.
- G male thread with O-ring makes installation more convenient and sealing easier.
- Long locking rings with convex shoulder and knurls for easier gripping and disconnecting.

个性化定制 Customized

- 可定制接头尾端匹配接口，方便安装。
- 定制软管集成，美观，降低泄漏风险。
- 其他定制要求请咨询我司。
- Providing customized end-fitting for easy installation.
- Providing customized hose integration with aesthetic appearance and reducing risk of leakage.
- For other customization requirements, please contact us freely.

BSL

流体连接器 Fluid Connector



应用领域 Application Fields

- 军工防务、航空航天等领域 Military defense, Aerospace and other fields
- 医疗设备 Medical equipment
- 数据中心、超级计算机 Data center, Supercomputer
- 核能、风电、光伏（储能、变流器）等新能源领域
Nuclear energy, wind power, photovoltaic (energy storage, converters) and other new energy fields
- 轨道交通、新能源汽车 Rail transit, New energy vehicles
- 工业 Industry

流体 Applicable Fluid Types

- 冷却液 Coolant
- 去离子水 Deionized Water
- 水-乙二醇 Glycol Water
- 导热油 Heat transfer oils
- 酯类 Esters
- 煤油 Kerosene
- PAO
-

基础型号

补充选项，后缀信息

BSL 06S G14F - SS - NB - 90 - RD

颜色 Colour

RD 红色 Red	GN 绿色 Green
YW 黄色 Yellow	BK 黑色 Black
BU 蓝色 Blue	

角度 Angle

00 直通 Straight through (默认, 型号不体现)
90 90度弯头 Degree Elbow
45 135度弯头 Degree Elbow

密封圈 Seals

EP 乙丙橡胶 Ethylene Propylene Rubber EPDM (默认, 型号不体现)	FF 高氟橡胶 Highly Fluorine Rubber FFKM
NB 丁腈橡胶 Nitrile Rubber NBR	CR 氯丁橡胶 Neoprene CR
FM 氟碳橡胶 Fluorocarbon Rubber FPM/FKM/Viton	
FV 氟硅橡胶 Fluorosilicone Rubber FVMQ	

材料 Material

不锈钢304+铜镀镍 Stainless steel 304+Brass nickel plated (默认, 型号不体现)
SA 不锈钢 Stainless steel 304
SS 不锈钢 Stainless steel 316L

内外螺纹 Male and Female Threads

F 内螺纹 Female Thread
M 外螺纹 Male Thread

G/R/N/J螺纹尺寸

18 1/8	32 1-1/2吋
14 1/4	01 1吋
38 3/8	02 2吋
12 1/2	04 4吋
34 3/4	

M螺纹尺寸

08 M8螺纹
12 M12螺纹
21 M21螺纹

H08 接08内径的橡胶软管

S10 接10mm外径的不锈钢管
B810 接8x10的铜管
T812 接8x12的塑料管
F3636 法兰孔位36x36

连接方式 End Fitting Type

G G螺纹 Thread	H 软管 Hose
R R螺纹 Thread	S 不锈钢管 Stainless Steel Tube
N NPT螺纹 Thread	B 铜管 Brass Tube
J UNF螺纹 JIC37 °锥 ISO8434	T 扣压塑料管 Plastic Tube
M M螺纹 Thread	F 法兰 Flange

插头插座 Coupling Type

S 插座 Socket
P 插头 Plug

等效通径 Equivalent Diameter

03 口径3mm	09 口径9mm	20 口径20mm
05 口径5mm	10 口径10mm	25 口径25mm
06 口径6mm	12 口径12mm	50 口径50mm
08 口径8mm	16 口径16mm	00 口径100mm

类目名称 Category Name

B 自动连接平面密封 Automatic Connecting With Flat Face Seal
S 不含锁紧系统 Without Locking Mechanism
T 其他 Others

BBT 卡口 Bayonet Locking Mechanism
BTG 三曲槽 Tri-Curve Groove Locking Mechanism
BSL 钢珠自锁 Auto Steel Ball Locking Mechanism
SCB 盲插 Blind-Mate, Without Lock Mechanism
SDB 位移盲插 Coaxial Correction Function Blind-mate, Without Locking Mechanism
TPP 推拉平面密封 Semi-auto Steel Ball Locking Mechanism
TSF 螺纹锁紧连接 Screw Locking Mechanism
TPB 按钮金属接头 Push-Button Locking Mechanism With Needle Valve

材质 Material	编码 Code	工作温度 Working temperature	应用 Application
丁腈橡胶 NBR	NB	-15 ~ + 100 °C	1、一般应用 2、良好的机械强度 1. General applications. 2. High mechanical strength.
氟碳橡胶 FPM、FKM、Viton	FM	-10 ~ + 200 °C	1、良好的耐化学性 2、优异的耐高温性能，可用于最高200 °C的应用 3、适用于矿物油、合成液压油、燃料、化工产品、碳氢化合物和导热流体回路 1. Good chemical resistance. 2. Outstanding resistance to high temperatures up to 200 °C. 3. Resistance to mineral oils, synthetic hydraulic oils, fuels, chemicals, hydrocarbons and coolants.
乙丙橡胶 EPDM	EP	-20 ~ + 150 °C	1、优异的耐高温性 2、适用于磷酸盐酯型制动液，冷、热水，蒸汽 3、注意介质回路各部件不能使用含矿物油的情况 1. Excellent resistance to high temperatures. 2. Compatible with phosphate-based brake fluids - esters, hot and cold water, steam. 3. Pay attention to the use of mineral oil in the components of the medium circuit
高氟橡胶 FFKM	FF	0 ~ + 250 °C	1、兼具弹性体和聚四氟乙烯耐化学腐蚀性的特点 2、具有很好的耐热性和耐多数化学剂 3、适用于导热流体 1. Combines the qualities of an elastomer with the chemical resistance of PTFE. 2. Remarkable resistance to heat and most chemical agents including inorganic and organic acids. 3. Coolants.
氟硅橡胶 FVMQ	FV	-45 ~ + 175 °C	1、最大工作压力：50 bar 2、良好的耐低温和耐高温性能 3、适用于矿物油、燃料 1. Max. working pressure: 50 bar. 2. Good resistance to low and high temperatures. 3. Resistance to mineral oils, fuels.
聚四氟乙烯 PTFE	PT	-50 ~ + 200 °C	1、最大工作压力：80 bar 2、良好的耐化学性 3、优异的耐低温和耐高温性能 4、比弹性体的性能更优异 1. Max. working pressure: 80 bar. 2. Excellent chemical resistance. 3. Very good resistance to low and high temperatures. 4. Superior performance to elastomers.
氯丁橡胶 CR	CR	-40 ~ + 100 °C	耐老化，特别适用于制冷剂 Good resistance to ageing and refrigerant.

为了选择最能满足您应用需求的解决方案，建议向我们提供如下准确信息：

In order to choose the solution that best meets your application needs, it is recommended to provide us with the following accurate information:

1、流体类型 2、工作压力 3、工作温度 4、水溶液的盐和酸浓度 5、特别的使用条件

1. Fluid type 2. Work pressure 3. Working temperature 4. Salt and acid concentration of aqueous solution 5. Special usage conditions

若需咨询，请随时联系我们的技术专家。

我们经验丰富的快速连接器专家，为您提供最贴心的服务。

If you need any inquiries, please feel free to contact our technical experts.


Our experienced quick connector experts provide you with the most thoughtful service.



普通型 Regular Type

产品型号 Product Model	BSL06	BSL08	BSL12	BSL16	BSL20	BSL25
额定工作压力 (bar) Nominal Working Pressure (bar)	16	16	16	16	16	16
Cv值 (Gal/min) Cv (Gal/min)	1.3	2.9	7.4	9.7	14.9	29.4
额定工作流量 (L/Min) Nominal Working Flow Rate (L/Min)	8.5	15.07	33.90	68.05	94.2	147.18
单次插拔最大泄露量 (ml) Leakage Per Disconnection (ml)	0.02	0.02	0.05	0.10	0.12	0.15

BSL流量曲线
BSL Pressure Drop/Flow Rate Chart

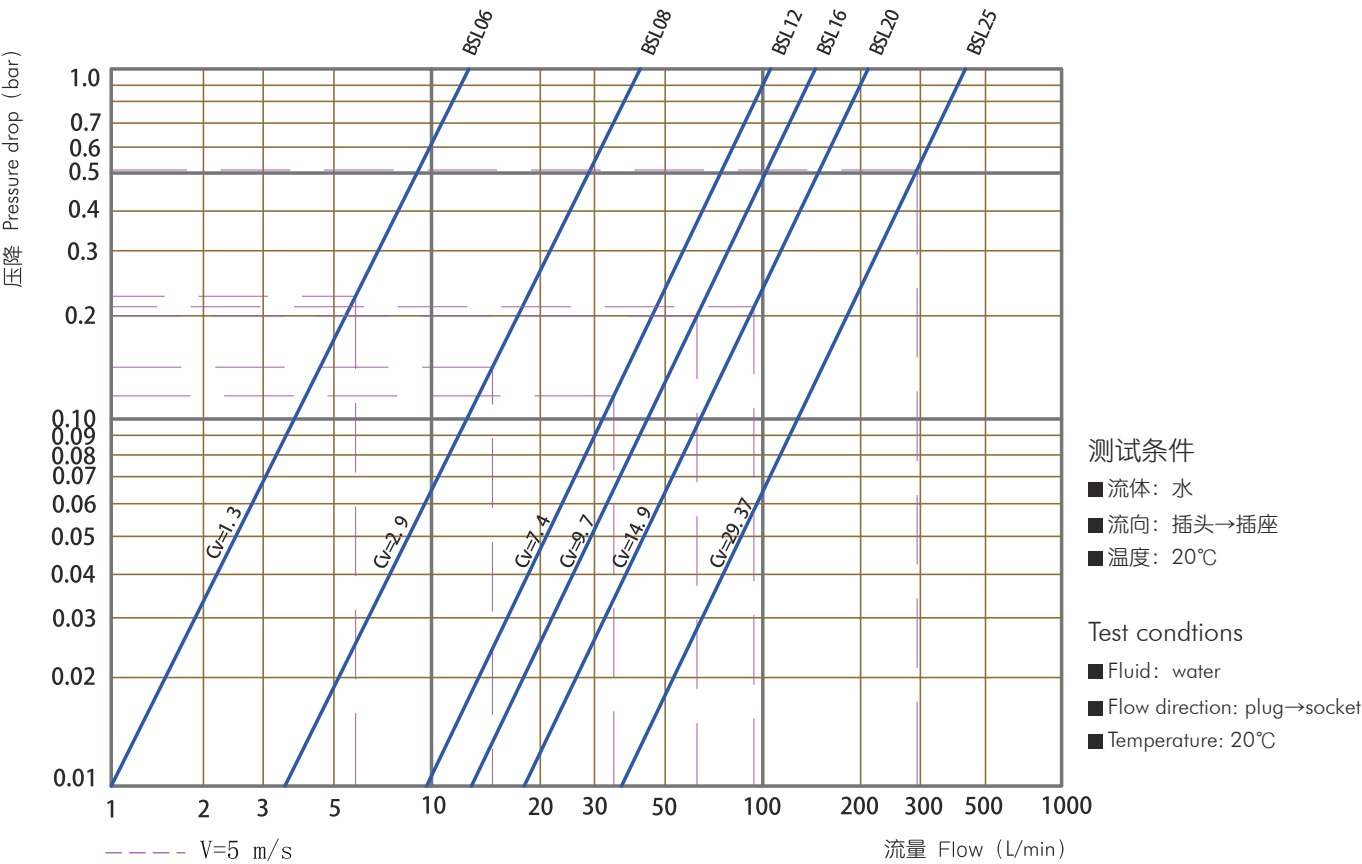

→ BSL06

插头插座连接图
Plug and socket connection diagram

$L = L1 + L2 - X$
 $X = 24.6\text{mm}$



	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头 Plug		G1/4 外螺纹 Male Thread	55	/	11	/	19	/	17	BSL 06P G14M
		G1/4 内螺纹 Female Thread	59	/	12	/	19	/	17	BSL 06P G14F
插座 Socket		G1/4 外螺纹 Male Thread	/	63	/	11	/	24	19	BSL 06S G14M
		G1/4 内螺纹 Female Thread	/	60.5	/	12	/	24	19	BSL 06S G14F


若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BSL08

插头插座连接图
Plug and socket connection diagram

$$L = L1 + L2 - X$$

$$X = 25.2\text{mm}$$

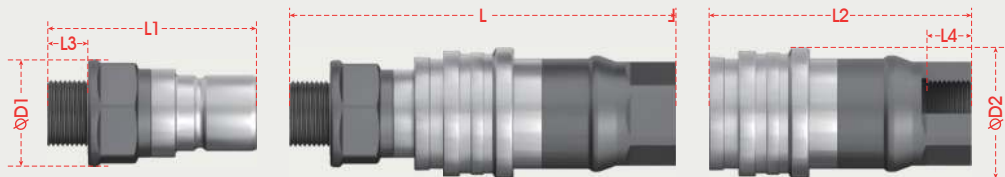

	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头 Plug		G3/8 外螺纹 Male Thread	53.5	/	12	/	23.5	/	21	BSL 08P G38M
		G3/8 内螺纹 Female Thread	57.5	/	13	/	26.5	/	24	BSL 08P G38F
插座 Socket		G3/8 外螺纹 Male Thread	/	55	/	12	/	26.5	24	BSL 08S G38M
		G3/8 内螺纹 Female Thread	/	59	/	13	/	26.5	24	BSL 08S G38F

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BSL12

插头插座连接图
Plug and socket connection diagram

$L=L1+L2-X$
 $X=27\text{mm}$




	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头 Plug		G1/2 外螺纹 Male Thread	68	/	14	/	34	/	30	BSL 12P G12M
		G1/2 内螺纹 Female Thread	73	/	15	/	34	/	30	BSL 12P G12F
插座 Socket		G1/2 外螺纹 Male Thread	/	84	/	14	/	42	30	BSL 12S G12M
		G1/2 内螺纹 Female Thread	/	89	/	15	/	42	30	BSL 12S G12F

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BSL16

插头插座连接图
Plug and socket connection diagram

$L = L1 + L2 - X$
 $X = 56.8\text{mm}$

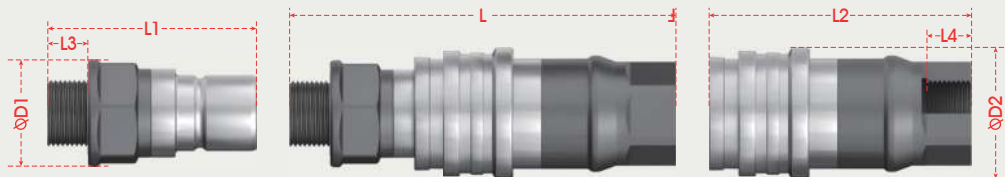


	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头 Plug		G3/4 外螺纹 Male Thread	100	/	16	/	41.5	/	38	BSL 16P G34M
		G3/4 内螺纹 Female Thread	105	/	17	/	41.5	/	38	BSL 16P G34F
插座 Socket		G3/4 外螺纹 Male Thread	/	125	/	16	/	53	38	BSL 16S G34M
		G3/4 内螺纹 Female Thread	/	130	/	17	/	53	36	BSL 16S G34F

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BSL20

插头插座连接图
Plug and socket connection diagram

$L = L1 + L2 - X$
 $X = 60\text{mm}$

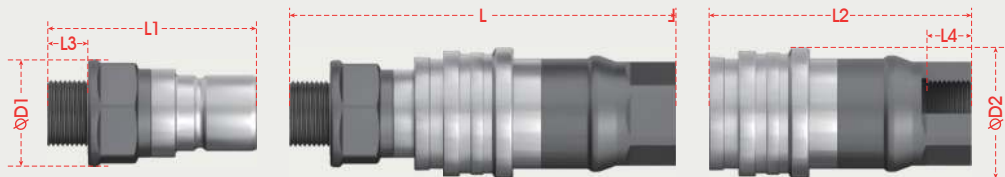

	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头 Plug		G1 外螺纹 Male Thread	113	/	20	/	/	/	55	BSL 20P G01M
		G1 内螺纹 Female Thread	114	/	21	/	/	/	55	BSL 20P G01F
插座 Socket		G1 外螺纹 Male Thread	/	139	/	20	/	60	55	BSL 20S G01M
		G1 内螺纹 Female Thread	/	139	/	21	/	60	55	BSL 20S G01F


若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ BSL25

插头插座连接图
Plug and socket connection diagram

$$L = L1 + L2 - X$$

$$X = 67.5\text{mm}$$

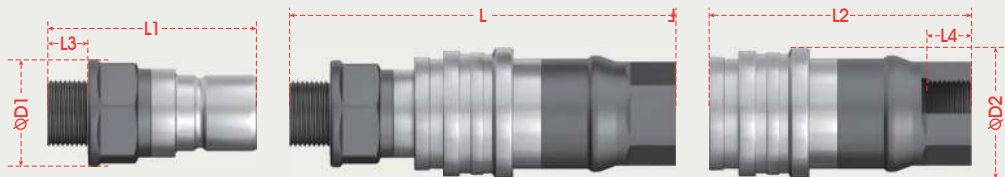

	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	Hex	Product model
插头 Plug		G1 外螺纹 Male Thread	122	/	20	/	/	/	55	BSL 25P G01M
		G1 内螺纹 Female Thread	123	/	21	/	/	/	55	BSL 25P G01F
插座 Socket		G1 外螺纹 Male Thread	/	148	/	20	/	67	55	BSL 25S G01M
		G1 内螺纹 Female Thread	/	148	/	21	/	67	55	BSL 25S G01F

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

倍仕得电气科技(杭州)股份有限公司
BEISIT ELECTRIC TECH (HANGZHOU) CO.,LTD.

浙江省杭州市临平经济开发区唐梅路1号 邮编: 311100

Add.: 1, Tangmei Rd., Linping Economic Development
Area, Hangzhou, Zhejiang 311100, China

Tel: 0086-571-8936 2888 E-mail: info@beisit.com

Http: // www.beisit.com

倍仕得电气科技(深圳)有限公司
BEISIT ELECTRIC TECH (SHENZHEN) CO.,LTD.

深圳龙华区壹成环智中心C座2803单元 邮编: 518110

Add.: Unit 2803, Building C, Yicheng Huanzhi Center,
Longhua District, Shenzhen 518110 China

Tel: 0086-755-23730413 E-mail: info@beisit.com

Http: // www.beisit.com



微信公众号



官网



抖音

We reserve the right to make technical changes or modify the contents of this document without prior notice. All the agreed particulars shall prevail. All rights reserved.