



倍仕得电气科技(杭州)股份有限公司
BEISIT ELECTRIC TECH (HANGZHOU) CO.,LTD.



Fluid Connector
TNP 流体连接器

倍仕得园区鸟瞰图
Beisit factory Aeroview



做人, 把人品做好,
做企业, 把产品做好。

董事长: 郑永

产品合集
Product Collection



品牌解析

Brand Definition



"I" stands for "Integrity 诚信"

"I" stands for "International 国际"

"BEST": Best 最好

做诚信的国际企业，以更好的品质服务客户

Functions as an international company of high integrity whose mission is to provide customer with finest products and services

倍仕得

倍：即多，广聚英才；加倍，业精于勤；倍增，高效发展

pronounced as "bei", means "more", gathering more talents; mastery of work comes from more diligence; developing with high efficiency.

仕：人才，德才兼备；仕途，个人和企业前景光明

pronounced as "shi", means "talents", a person with ability and integrity; Both enterprise and individual should have a bright future, indicating the idea of people-oriented.

得：拥有，拥有更高价值

pronounced as "de", means "possess", to create and possess higher value.

广聚英才，共创美好未来

Gather a large number of talents, and create a glorious future


流体连接器净化车间

Quick Fluid Connector Purification Workshop

BEISIT®

精密刀具设计制造能力

Design and Manufacture of Precision Cutting Tools.



精密刀具设计制造

Design and Manufacture of Precise Cutting Tools



精密刀具设计制造能力

Design and Manufacture of Precision Cutting Tools

加工精度最高能精确到0.01mm


The machining accuracy can be accurate to 0.01mm

3天提供金属样件

3days to provide metal samples

7天样件交付

7days to deliver samples



企业认证 Company Certifications



信息化系统 Informatization System



高效快捷的信息化系统
Efficient and fast Informatization system.



检测中心 Testing Center

BEISIT

原材料：金属材质检测

The raw materials:metal material testing

密封件：抗老化测试、硬度检测

The sealing:anti-aging test,hardness testing

弹簧：疲劳测试，弹力值检测

The spring:fatigue test,spring force detection



高低温交变湿热试验箱
High and Low Temperature Alternating Humid Heat Test Chamber



流量流阻测试仪
Flow resistance tester



全自动数显弹簧疲劳试验机
Automatic digital display spring fatigue testing machine

企业文化

Corporate Culture



倍仕得使命：为全球工业提供最可靠的连接器产品
Mission: To supply most reliable connectors for global industry.

客户价值观：敬畏客户；为客户创造独特价值的决心不动摇
Customer Value: Revere clients; Never waver in determination to create unique value for our clients.

品质价值观：品质如命，只有一次；做出100%合格产品的决心不动摇
Quality Value: Quality as life, only once. Never waver in determination to produce 100% qualified products.

A large, detailed image of the Earth from space, showing the Americas. Overlaid on the globe is a complex network of glowing blue lines and dots, representing global connectivity and technology.

连接世界 · 连接未来

TNP

流体连接器

Fluid Connector



安全环保 Safe & Environmental

- TNP系列产品，采用塑料圆珠锁紧，不损坏被测试件。
- TNP系列产品，可以选择带阀，以满足断开即截止需求。
- 接头均配有保护套，防止在运输中密封面受污染。
- TNP series products, the adoption of plastic ball locking, will not damage the tested parts.
- The TNP series, with optional valving, is available for disconnect-to-shutoff requirements.
- Connector is equipped with protective caps to prevent the sealing surface from being polluted during transportation.

稳定可靠 Stable & Reliable

- 多排圆珠锁紧，保证连接时的锁紧稳定，密封可靠。
- TNP系列产品，本体采用不锈钢材质，推拉环采用铜镀镍材质，使得接头更耐用，又保护被测试件。
- 有多种密封材质O型圈可选，适应不同介质温度需求，保证密封效果长期稳定可靠。
- Multi-row ball locking ensures stable locking and reliable sealing when connecting.
- TNP series products consist of stainless steel bodies and nickel-plated brass sleeves, which provide durability itself and protection for the tested parts.
- A variety of sealing material O-rings are available to meet the temperature requirements of different media and guarantees long term stable & reliable sealing performance.

方便快捷 Convenient

- 圆珠锁紧半自动连接，推入即可锁紧连接并密封，操作轻松，方便快捷。
- 每款TNP产品都可以适配较大的公差范围，提供适配多款测试件的可能性，减少客户换型困扰。
- TNP系列产品可以提供90度转接头，更方便操作。
- 凸肩和滚花的长锁紧环更容易抓握和断开。
- Ball locking semi-automatic connection, push-in to lock the connection and seal, easy to operate, convenient and quick.
- Each TNP product provides a wide range of tolerances, offering the possibility of adapting to a wide range of tested parts and reducing the hassle of changeover for customers.
- The TNP series can be fitted with a 90-degree adapter for easier handling.
- Long locking rings with convex shoulder and knurls for easier gripping and disconnecting.

个性化定制 Customized

- 可定制接头尾端匹配接口，方便安装。
- 定制软管集成，美观，降低泄漏风险。
- 其他定制要求请咨询我司。
- Providing customized end-fitting for easy installation.
- Providing customized hose integration with aesthetic appearance and reducing risk of leakage.
- For other customization requirements, please contact us freely.

TNP

流体连接器 Fluid Connector



应用领域 Application Fields

- 新能源汽车三电测试 New energy vehicle EIC system testing
- 传统汽车发动机测试 Traditional vehicle engine testing
- 冷媒，燃油加注 Refrigerant, Fuel Filling

适用介质 Applicable Fluid Types

- 冷却液 Coolant
- 水-乙二醇 Glycol Water
- 导热油 Heat transfer oils
- 酯类 Esters
- 煤油 kerosene

.....

基础型号

补充选项，后缀信息

TNP 16V G38F NW- BR - FV - 90

角度 Angle

直通 Straight through (默认, 型号不体现)
90 90度弯头 Degree Elbow
45 135度弯头 Degree Elbow

密封圈 Seals

乙丙烯橡胶 Ethylene Propylene Rubber EPDM (默认, 型号不体现)
NB 丁腈橡胶 Nitrile Rubber NBR
FM 氟碳橡胶 Fluorocarbon Rubber FPM/FKM/Viton
FV 氟硅橡胶 Fluorosilicone Rubber FVMQ
FF 高氟橡胶 Highly Fluorine Rubber FFKM
CR 氯丁橡胶 Neoprene CR

材料 Material

铜+不锈钢304 Stainless steel 304+Brass nickel plated (默认, 型号不体现)
BR 铜 Brass With Nickel Plated
SA 不锈钢 Stainless Steel 304

接头型号 Type

NW NW型号 Type
SAE SAE型号 Type
MDC MDC型号 Type

内外螺纹 Male and Female Threads

F 内螺纹 Female Thread
M 外螺纹 Male Thread

G/R/N/J螺纹尺寸 Size

18 1/8 32 1-1/2吋
14 1/4 01 1吋
38 3/8
12 1/2
34 3/4

M螺纹尺寸 Size

08 M8螺纹
12 M12螺纹
21 M21螺纹
H08 接08内径的橡胶软管
T812 接8x12的塑料管

连接方式 End fitting type

G G螺纹 Thread
M M螺纹 Thread
H 软管 Hose
T 扣压塑料管 Plastic tube

是否带阀 Valved or not

V 带阀 Valved
无V-free 无阀 Unvalved

接头型号大小 Connector Size

04 4mm 14 14mm
06 6mm 16 16mm
08 8mm 20 20mm

类目名称 Category name

T 其他 Other
N 非金属圆珠 Non metallic ball-locking
P 推拉环 Sleeved

材质 Material	编码 Code	工作温度 Working temperature	应用 Application
丁腈橡胶 NBR	NB	-15 ~ + 100 °C	1、一般应用 2、良好的机械强度 1. General applications. 2. High mechanical strength.
氟碳橡胶 FPM、FKM、Viton	FM	-10 ~ + 200 °C	1、良好的耐化学性 2、优异的耐高温性能，可用于最高200 °C的应用 3、适用于矿物油、合成液压油、燃料、化工产品、碳氢化合物和导热流体回路 1. Good chemical resistance. 2. Outstanding resistance to high temperatures up to 200 °C. 3. Resistance to mineral oils, synthetic hydraulic oils, fuels, chemicals, hydrocarbons and coolants.
乙丙橡胶 EPDM	EP	-20 ~ + 150 °C	1、优异的耐高温性 2、适用于磷酸盐酯型制动液，冷、热水，蒸汽 3、注意介质回路各部件不能使用含矿物油的情况 1. Excellent resistance to high temperatures. 2. Compatible with phosphate-based brake fluids - esters, hot and cold water, steam. 3. Pay attention to the use of mineral oil in the components of the medium circuit
高氟橡胶 FFKM	FF	0 ~ + 250 °C	1、兼具弹性体和聚四氟乙烯耐化学腐蚀性的特点 2、具有很好的耐热性和耐多数化学剂 3、适用于导热流体 1. Combines the qualities of an elastomer with the chemical resistance of PTFE. 2. Remarkable resistance to heat and most chemical agents including inorganic and organic acids. 3. Coolants.
氟硅橡胶 FVMQ	FV	-45 ~ + 175 °C	1、最大工作压力：50 bar 2、良好的耐低温和耐高温性能 3、适用于矿物油、燃料 1. Max. working pressure: 50 bar. 2. Good resistance to low and high temperatures. 3. Resistance to mineral oils, fuels.
聚四氟乙烯 PTFE	PT	-50 ~ + 200 °C	1、最大工作压力：80 bar 2、良好的耐化学性 3、优异的耐低温和耐高温性能 4、比弹性体的性能更优异 1. Max. working pressure: 80 bar. 2. Excellent chemical resistance. 3. Very good resistance to low and high temperatures. 4. Superior performance to elastomers.
氯丁橡胶 CR	CR	-40 ~ + 100 °C	耐老化，特别适用于制冷剂 Good resistance to ageing and refrigerant.

为了选择最能满足您应用需求的解决方案，建议向我们提供如下准确信息：

In order to choose the solution that best meets your application needs, it is recommended to provide us with the following accurate information:

1、流体类型 2、工作压力 3、工作温度 4、水溶液的盐和酸浓度 5、特别的使用条件

1. Fluid type 2. Work pressure 3. Working temperature 4. Salt and acid concentration of aqueous solution 5. Special usage conditions

若需咨询，请随时联系我们的技术专家。


我们经验丰富的快速连接器专家，为您提供最贴心的服务。

If you need any inquiries, please feel free to contact our technical experts.

Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 12-NW

插头插座连接图
Plug and socket connection diagram

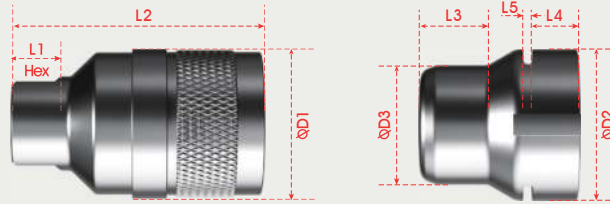


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	D3	Hex	Product model
插座 Socket		G3/8 内螺纹 Female Thread	13	56	/	/	/	34	/	/	22	TNP 12 G38F-NW
插头 Plug		/	/	/	14~24	>4	1.8	/	21.5 ^{+0.02} _{-0.02}	16.3 ^{-0.3} _{-0.3}	/	NW 12
		/	/	/	14~24	>4	1.8	/	21.5 ^{+0.02} _{-0.02}	16.3 ^{-0.3} _{-0.3}	/	NW 12
		/	/	/	14~24	>4	1.8	/	21.5 ^{+0.02} _{-0.02}	16.3 ^{-0.3} _{-0.3}	/	NW 12
		/	/	/	14~24	>4	1.8	/	21.5 ^{+0.02} _{-0.02}	16.3 ^{-0.3} _{-0.3}	/	NW 12
		/	/	/	14~24	>4	1.8	/	21.5 ^{+0.02} _{-0.02}	16.3 ^{-0.3} _{-0.3}	/	NW 12
		/	/	/	14~24	>4	1.8	/	21.5 ^{+0.02} _{-0.02}	16.3 ^{-0.3} _{-0.3}	/	NW 12

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 14-NW

插头插座连接图
Plug and socket connection diagram

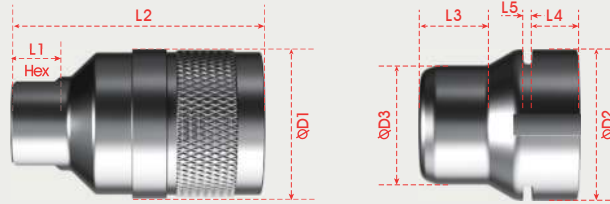


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	D3	Hex	Product model
插座 Socket		G3/8 内螺纹 Female Thread	13	60	/	/	/	37	/	/	22	TNP 14 G38F-NW
插头 Plug		/	/	/	14~24	>4	1.8	/	25.0 ^{+0.02} _{-0.02}	20.5 ^{-0.3} _{-0.3}	/	NW 14
		/	/	/	14~24	>4	1.8	/	25.0 ^{+0.02} _{-0.02}	20.5 ^{-0.3} _{-0.3}	/	NW 14
		/	/	/	14~24	>4	1.8	/	25.0 ^{+0.02} _{-0.02}	20.5 ^{-0.3} _{-0.3}	/	NW 14
		/	/	/	14~24	>4	1.8	/	25.0 ^{+0.02} _{-0.02}	20.5 ^{-0.3} _{-0.3}	/	NW 14
		/	/	/	14~24	>4	1.8	/	25.0 ^{+0.02} _{-0.02}	20.5 ^{-0.3} _{-0.3}	/	NW 14
		/	/	/	14~24	>4	1.8	/	25.0 ^{+0.02} _{-0.02}	20.5 ^{-0.3} _{-0.3}	/	NW 14

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 16-NW

插头插座连接图
Plug and socket connection diagram

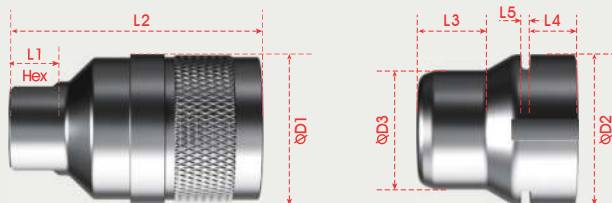


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	D3	Hex	Product model
插座 Socket		G3/8 内螺纹 Female Thread	13	65.6	/	/	/	40	/	/	22	TNP 16 G38F-NW
插头 Plug		/	/	/	14~24	>4	1.8	/	$28.3^{+0.02}_{-0.02}$	$22.3^{+0.03}_{-0.03}$	/	NW 16
		/	/	/	14~24	>4	1.8	/	$28.3^{+0.02}_{-0.02}$	$22.3^{+0.03}_{-0.03}$	/	NW 16
		/	/	/	14~24	>4	1.8	/	$28.3^{+0.02}_{-0.02}$	$22.3^{+0.03}_{-0.03}$	/	NW 16
		/	/	/	14~24	>4	1.8	/	$28.3^{+0.02}_{-0.02}$	$22.3^{+0.03}_{-0.03}$	/	NW 16
		/	/	/	14~24	>4	1.8	/	$28.3^{+0.02}_{-0.02}$	$22.3^{+0.03}_{-0.03}$	/	NW 16
		/	/	/	14~24	>4	1.8	/	$28.3^{+0.02}_{-0.02}$	$22.3^{+0.03}_{-0.03}$	/	NW 16

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 16-MDC

插头插座连接图
Plug and socket connection diagram

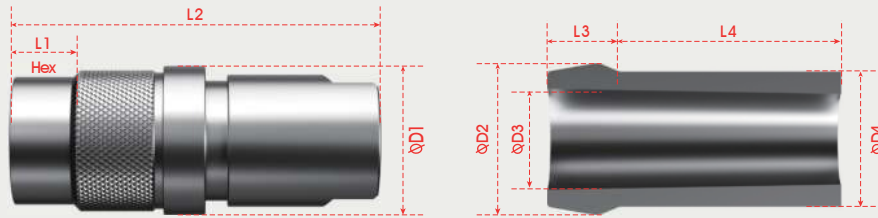


	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	D3	D4	Hex	Product model
插座 Socket		G3/8 内螺纹 Female Thread	13	82	/	/	34	/	/	/	24	TNP 16 G38F-MDC
插头 Plug		/	/	/	4~9	>16	/	18.1 ⁰ _{-1.0}	13.0 ^{+1.5} _{-1.5}	16.0 ^{+0.15} ₀	/	MDC 16
		/	/	/	4~9	>16	/	18.1 ⁰ _{-1.0}	13.0 ^{+1.5} _{-1.5}	16.0 ^{+0.15} ₀	/	MDC 16
		/	/	/	4~9	>16	/	18.1 ⁰ _{-1.0}	13.0 ^{+1.5} _{-1.5}	16.0 ^{+0.15} ₀	/	MDC 16

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 20-MDC

插头插座连接图
Plug and socket connection diagram

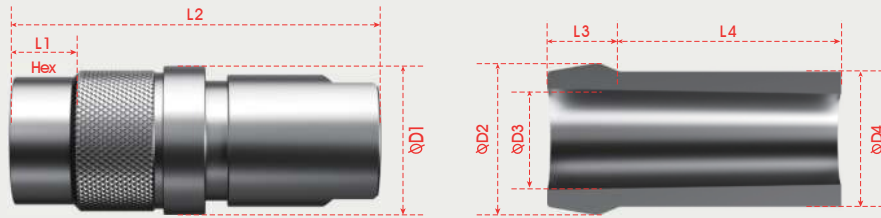


	Picture	End Fitting Type	L1	L2	L3	L4	D1	D2	D3	D4	Hex	Product model
插座 Socket		G3/8 内螺纹 Female Thread	13	90	/	/	40	/	/	/	24	TNP 20 G38F-MDC
插头 Plug		/	/	/	4~9	>16	/	22.4 ⁰ _{-1.0}	16.0 ^{+1.5} _{-1.5}	20.0 ^{+0.15} ₀	/	MDC 20
		/	/	/	4~9	>16	/	22.4 ⁰ _{-1.0}	16.0 ^{+1.5} _{-1.5}	20.0 ^{+0.15} ₀	/	MDC 20
		/	/	/	4~9	>16	/	22.4 ⁰ _{-1.0}	16.0 ^{+1.5} _{-1.5}	20.0 ^{+0.15} ₀	/	MDC 20

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 06-SAE

插头插座连接图
Plug and socket connection diagram

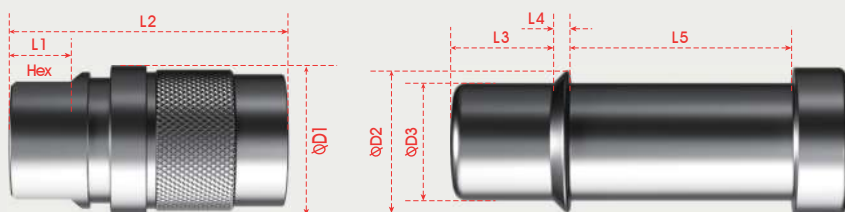

	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	D3	Hex	Product model
插座 Socket		G1/4 内螺纹 Female Thread	12	58	/	/	/	26	/	/	24	TNP 06 G14F-SAE
插头 Plug		/	/	/	8~33	<3	>8	/	10.1 ⁰ ₋₁	6.5 ⁰ _{0.1}	/	SAE 06
		/	/	/	8~33	<3	>8	/	10.1 ⁰ ₋₁	6.5 ⁰ _{0.1}	/	SAE 06

若需咨询其他尾端连接方式，请随时联系我们的技术专家。


我们经验丰富的快速连接器专家，为您提供最贴心的服务。

If you need to inquire about other end fitting, please feel free to contact our technical experts.

Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 16-SAE

插头插座连接图
Plug and socket connection diagram

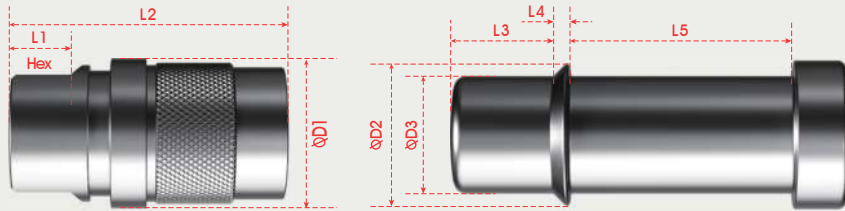


	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	D3	Hex	Product model
插座 Socket		G1/4 内螺纹 Female Thread	13	62.1	/	/	/	33	/	/	24	TNP 16 G14F-SAE
插头 Plug		/	/	/	13~34	<3.5	>9	/	19.4 ⁰ ₋₁	16.0 ⁰ _{±3}	/	SAE 16
		/	/	/	13~34	<3.5	>9	/	19.4 ⁰ ₋₁	16.0 ⁰ _{±3}	/	SAE 16

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

→ TNP 16-MDC-SAE

插头插座连接图
Plug and socket connection diagram

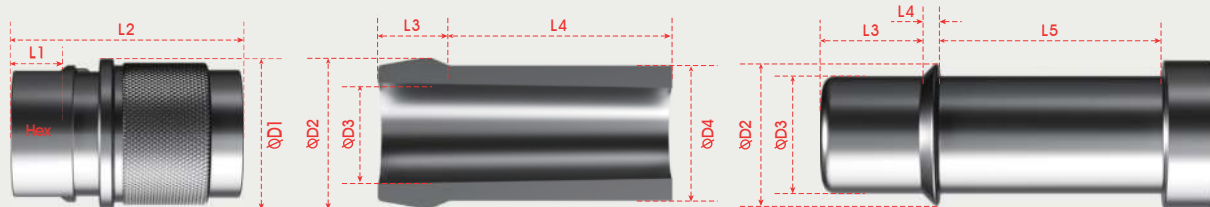

	Picture	End Fitting Type	L1	L2	L3	L4	L5	D1	D2	D3	D4	Hex	Product model
插座 Socket		G3/8 内螺纹 Female Thread	13	48.5	/	/	/	33	/	/	/	24	TNP 16 G38F- MDC-SAE
插头 Plug		/	/	/	8~9	>21	/	/	18.1 ⁰ _{-1.0}	/	16.0 ^{+0.15} ₋₀	/	MDC 16
		/	/	/	>25	<2	>8	/	19.4 ⁰ _{-1.0}	16.0 ⁰ _{-0.3}	/	/	SAE 16

若需咨询其他尾端连接方式，请随时联系我们的技术专家。
我们经验丰富的快速连接器专家，为您提供最贴心的服务。
If you need to inquire about other end fitting, please feel free to contact our technical experts.
Our experienced quick connector experts provide you with the most thoughtful service.

倍仕得电气科技(杭州)股份有限公司
BEISIT ELECTRIC TECH (HANGZHOU) CO.,LTD.

浙江省杭州市临平经济开发区唐梅路1号 邮编: 311100

Add.: 1, Tangmei Rd., Linping Economic Development
Area, Hangzhou, Zhejiang 311100, China

Tel: 0086-571-8936 2888 E-mail: info@beisit.com

Http: // www.beisit.com

倍仕得电气科技(深圳)有限公司
BEISIT ELECTRIC TECH (SHENZHEN) CO.,LTD.

深圳龙华区壹成环智中心C座2803单元 邮编: 518110

Add.: Unit 2803, Building C, Yicheng Huanzhi Center,
Longhua District, Shenzhen 518110 China

Tel: 0086-755-23730413 E-mail: info@beisit.com

Http: // www.beisit.com



微信公众号



官网



抖音

We reserve the right to make technical changes or modify the contents of this document without prior notice. All the agreed particulars shall prevail. All rights reserved.